
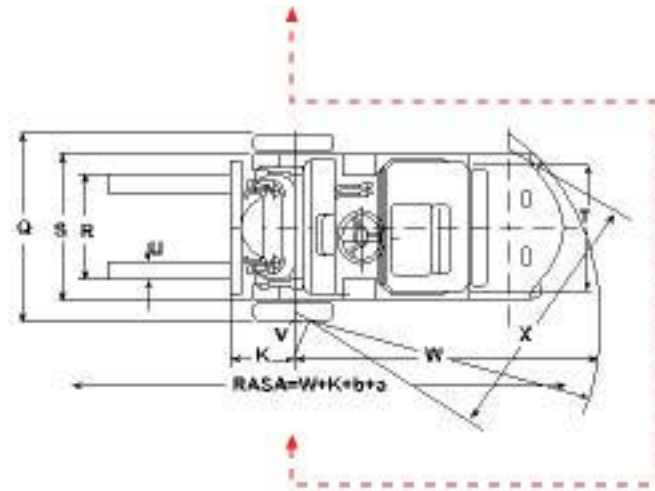


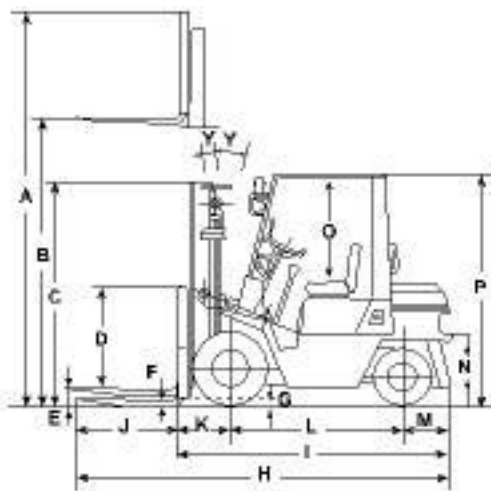

Standard Dimensions (Front Single Tyre)

Model		FD30M1
		mm
A.	Overall height, fork raised (with backrest)	4250
B.	Max. fork height	3000
C.	Overall height, fork lowered (upright)	2070
D.	Backrest height (from upper face of forks)	1220
E.	Free lift	305
F.	Fork thickness	45
G.	Min. under-clearance (bottom of mast)	135
H.	Overall length (with forks)	3763
I.	Overall length (without forks)	2693
J.	Fork length	1070
K.	Fork overhang	498
L.	Wheel base	1700
M.	Rear overhang	495
N.	Coupler height	310
O.	Overhead guard clearance (from face of seat)	1035
P.	Overall height (overhead guard)	2090
Q.	Overall width	1225
R.	Lateral fork adjustment (outside of fork)	250-1090
S.	Tread (front)	1000
T.	Tread (rear)	970
U.	Fork width	125
V.	Inside turning radius	200
W.	Outside turning radius	2400
X.	Min. Intersecting aisle	2110
Y.	Tilting angles (forward-backward)	" 6 " 12

Millat Tractors reserves the right to change the specifications without prior notice.

Note

Capacities shown are computed with upright in vertical position. Load centers are determined for front face of forks. Capacities are based on a 1000 mm cube load configuration with the center of gravity at the true center of the cube, and standard forks. Truck capacities with upright in forward tilt position will be less. Long forks, and unusually wide or loads may also reduce capacity.

